



Assembly Instructions

Parts and Tools list


NO.	Name	Qty	NO.	Name	Qty
1	Support Beam	1	11	Spanner	1
2	Feet	2	12	ST3.5*16 Screw	2
3	M6*14 Screw	16	13	ST4.8*16 Screw	8
4	Bracket	2			
5	Lifting System	1set			
6	M6*10 Screw	8			
7	Driveshaft	1set			
8	4mm Hex Spanner	1			
9	M6*12 Screw	8			
10	Rubber Cushion	6			

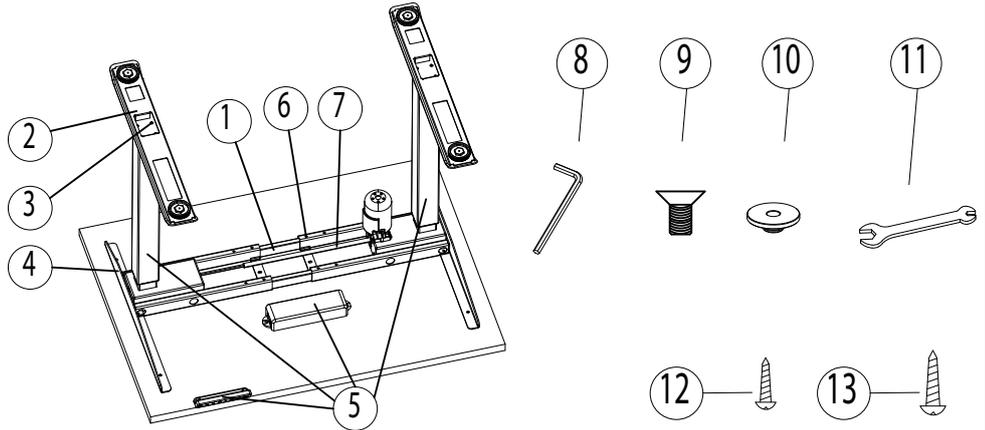


1 Loosen the 4pcs M6*10 screws on the beam with a 4mm hex spanner and extend the beam.

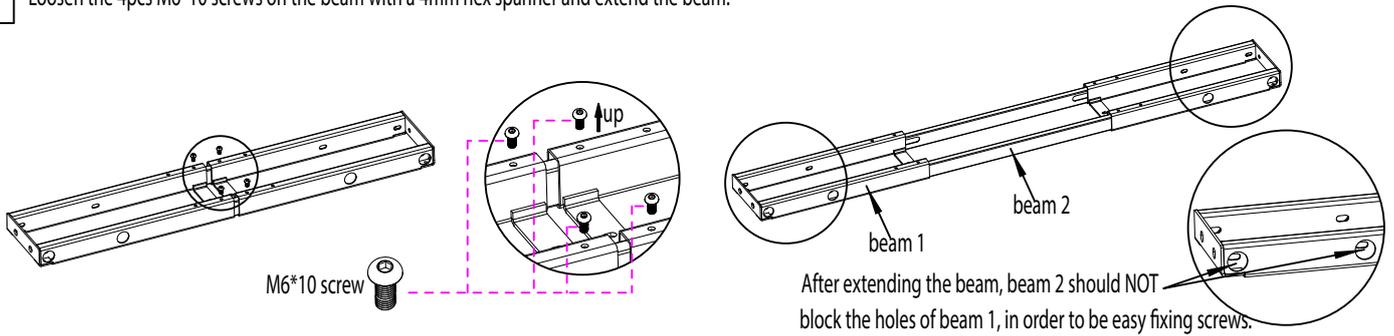


2 Fix the lifting leg to the beam with 8 pcs M6*14 screws and 4pcs M6*12 screws, shorten the beam to the next desktop's size and fix the beam with 8pcs M6*10 screws. (4pcs M6*10 screws in the screw bag)

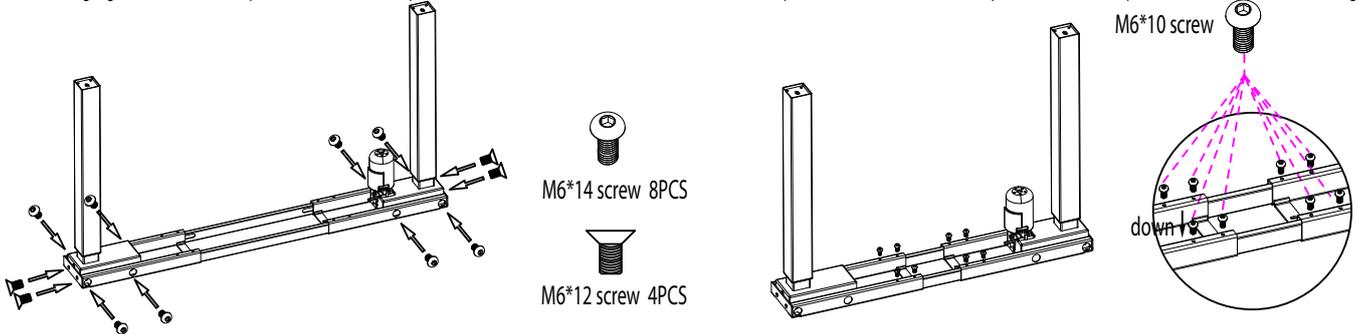


3 Fix the foot on the lifting leg with 8pcs M6*14 screws.

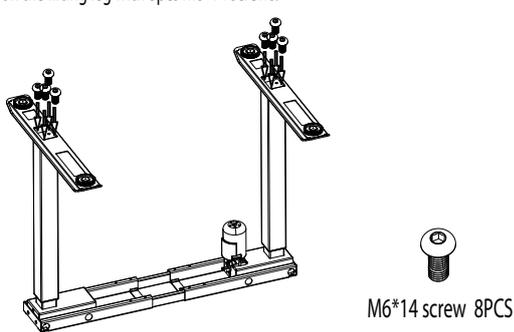


4 Overturn frame and fix the brackets to beam using 4 of M6*12 screws, and then fit the rubber cushions to the brackets and beams.

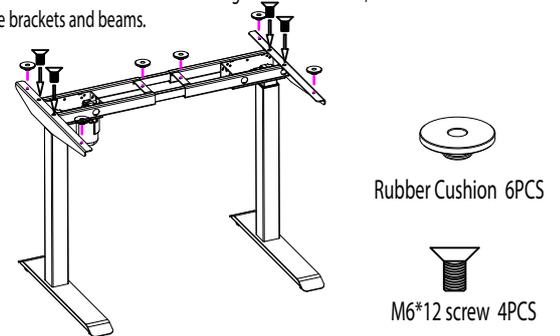


5 Loosen the nut on the transmission rod with a wrench, pull out the hexagon rod inside the transmission rod (be careful not to pull out one end with slot), install one end of the transmission rod with nut on the hexagon rod of the main leg, insert the hexagon rod into the gear box of the secondary leg, and finally lock the two nuts on the transmission rod.

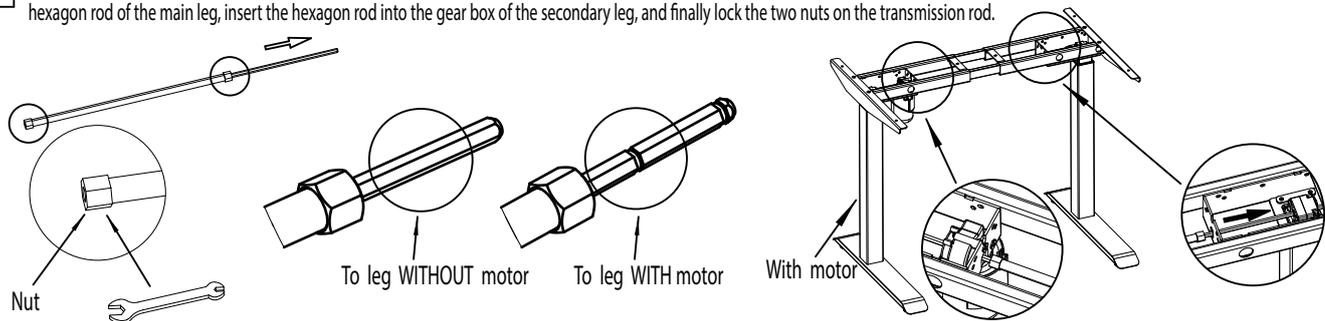

- 6 Fix the frame and the control box to the underside of the desktop using 8 of ST4.8 self-tapping screws, fix handset to the underside of desktop using 2 of ST3.5 self-tapping screw.

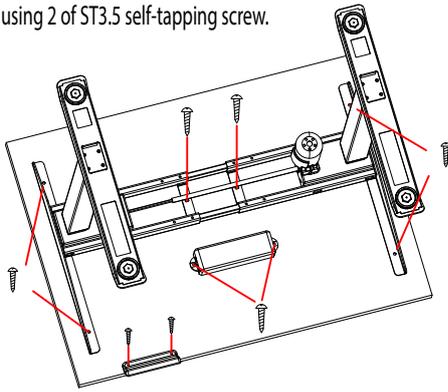

- 7 Connect the control box to the handset and to the motor.

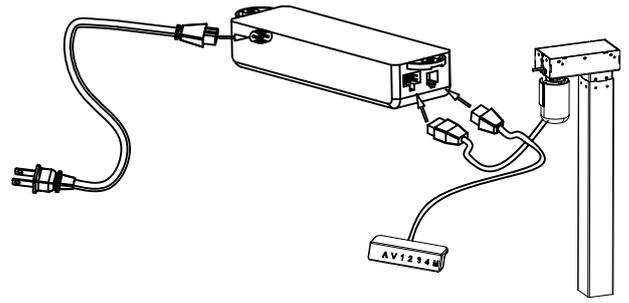

Operation Guide

1. System Initialization

When we complete the installation of the desk frame, we need to reset the system, to make the system be initialized.

Resetting procedure is as follows, press and hold on both «↑» and «↓» button together until the lifting column be lowest and you will hear a beep, and the display shows the number for the lowest height, then whole steps finishes. If the system doesn't work normally when we use it, we need to repeat the above procedure.

2. Normal Operation

Drive the desk to the desired height when pressing and holding «↑» and «↓» button.

3. Setting the memory function

When the desk rises to the height which you want to memorize, please press and hold the "M" button till the display flashes and then press "1" button. Position 1 is now memorized. Repeat the above procedure for positions 2, 3 & 4. These four number buttons can memorize four different heights repeatedly. And those data won't be lost in case power is off.

4. The function of metric-inch conversion

The function base on the premise that original keys function unchangeable, procedure as follows:

1. Press the "1" "2" "M" buttons together for about 5s, display "C-E" (flashing)---then continue to procedure 2,3
2. Press button "1" within 5s, display "C", then switch to metric system CM---go into the general operation
3. Press button "2" within 5s, display "E" then switch to British system Inch----go into the general operation
4. If above procedures no further operate over 5s , then will recover to the previous setting.

Notice

- 1: This product must meet the actual technical parameters in use.
- 2: The system should be away from water and corrosion resistant gas.
- 3: Please contact us or our distributors if there is anything wrong with the product.